



SL3s-M LED Street light

Ordering Information

ESU-EA013P03240M-150DAU1-1112N


ESU	E	A01	2M	032	40	M	150
e-lite star LED Street Light	Product Series E – SL3s Series	Input Voltage A01 – 120~277 VAC	Lateral Light Distribution 2M – Type II Medium 3M – Type III Medium 3P – Advance Type III Medium 5M – Type V Medium	LED Number 032 – 32 LEDs	Color Temperature 40 – 4000K 50 – 5000K	Luminaire Type M – 2-Modules	LED Driving Current 150 – 1500 mA

Specifications


400W HPS Equivalent

Type	SL3s-M
Number of LEDs	32
Luminous Flux (lm) (Typ.)	15853
Power Consumption (W) (Typ.)	162
LED Driving Current (mA)	1500
Efficacy (lm/W)	> 97
Center Lumination (fc)	2.1 fc @ 30 ft (for 1.5A)
Light Distribution	Type II / Type III / Advance Type III / Type V
Correlated Color Temperature (CCT) (K) (Typ.)	4000K / 5000K
Operating Voltage Range (VAC)	120 ~ 277
Color Rendering Index (CRI) (Typ.)	≥ 70
Power Factor (PF)	> 0.95 (for 120 Vac)
Total Harmonic Distortion (THD) (%)	< 20%
Operating Temperature Range	-40°F ~ +130°F
Ingress Protection Classification	IP66 (for light engine)
Material Characteristics	Aluminum Die Casting, UV Resistance PC
Weight (lbs)	< 19.0
Surge Protection	IEEE C62.41 C High (Max. Peak Current: 10KA)
EPA	0.66


Dimensions

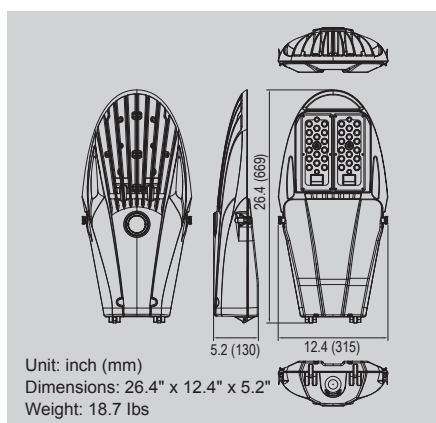

Photometric

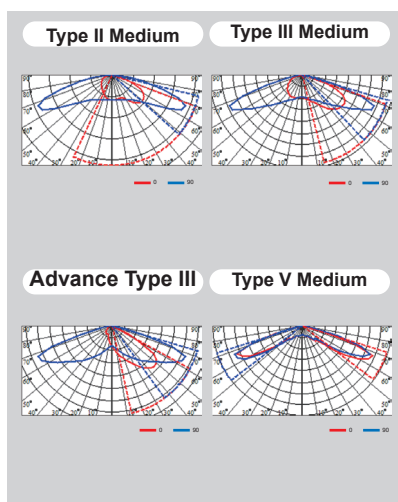

Isotropic Illumination Distribution

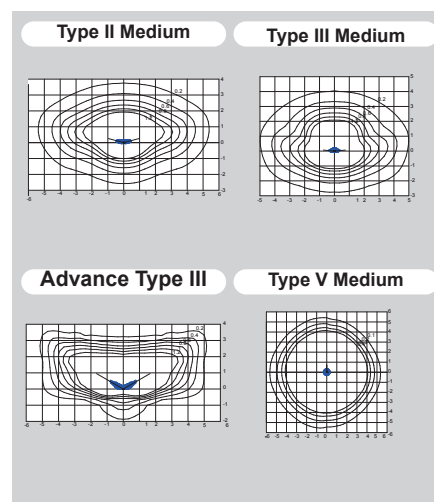

Product Certifications



SL3 LED Street light

Accessory Options



Ordering Information

C	A	U	1		1	1	1	1
LED Type	Finish	Safety Certificate	Door Entry		Dimmable Driver	Control Option	SPD Option	Additional Option
C – SL3c D – SL3s F – SL3x K – SL3x Mini	A – Gray B – Bronze I – Light Gray J – Black	U – UL	1 – Tool Less		1 – 0-10V	N – None 1 – 3-pin Receptacle 2 – Standard Photocell 3 – Shorting Cap 4 – Longlife Photocell 5 – 7-pin Receptacle	1 – 10kV/10kA 3 – 20kV/20kA 4 – 20kV/10kA FTO	N – None 1 – House Side Shield 2 – Bird Guard 3 – House Side Shield & Bird Guard 6 – 5' Pig Tail